



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 29 JUL 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

BEST AVAILABLE COPY

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03102171.0 ✓

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:

Application no.: 03102171.0 ✓

Demande no:

Anmeldetag:

Date of filing: 15.07.03 ✓

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.

Groenewoudseweg 1

5621 BA Eindhoven

PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se referer à la description.)

Beverage maker suitable for use at high altitude

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

A47J31/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**Beverage maker suitable for use at high altitude**

The present invention relates to a beverage maker including a boiler for heating water and a pump for displacing heated water from the boiler via a discharge channel through a beverage brewing unit. In such beverage makers it is usual that some water escapes via the discharge channel during heating of water in the boiler, due to expansion of the water in the boiler as it is heated. In practice, this frequently leads to leakage complaints from consumers and soiling of the platform on which cups or other receptacles are placed to receive brewed beverage therein.

In International Patent Application WO02/088580 a valve is described which, when positioned in a return channel from the boiler to a water reservoir from which water is supplied to the boiler, allows excess volumes of water to escape from the boiler back to the water reservoir, while the valve is in its normal, open condition, so that excess volumes of water obtained due to expansion of water in the boiler do not escape via the discharge channel. When the water is being pumped from the boiler to the coffee brewing unit at a substantial pressure to obtain the desired brewing conditions, the pressure drop over the valve exceeds a shut-off value, in response to which the valve closes. In this closed position, the valve prevents heated water from returning to the water reservoir, so that the heated water flows to the brewing unit only.

A disadvantage of beverage makers as discussed above is that, when the beverage maker is used at relatively high altitudes, water in the boiler reaches its boiling temperature at a temperature that is too low to allow brewing of high quality beverage, in particular taking into account heat losses that occur before and during brewing. Another problem of such beverage makers having a thermostatically controlled heater is that, when used at high altitude, the water starts to boil before the water temperature is reached at which the heater is switched off. As a result excessive steam formation occurs and continuing to heat the water in the boiler after it has reached its boiling temperature wastes energy.

It is an object of the present invention to provide a beverage maker in which water is heated to a sufficiently high temperature for brewing beverage, even if the beverage maker is used at high altitude, while excess volumes of water obtained due to expansion of water in the boiler are nevertheless returned to the water reservoir.

5           According to the present invention, this object is achieved by providing a beverage maker according to claim 1. By preventing the passage of water to the return outlet and the discharge outlet if the pressure in the boiler is below a predetermined relief pressure higher than the atmospheric pressure, an overpressure in the boiler is ensured before the water is discharged under higher pressure for brewing beverage. This in turns ensures that the  
10           water can be heated to a boiling temperature, which is sufficiently high for brewing high quality beverage, even if the beverage making is carried out at high altitude.

          In beverage makers with a thermostatically controlled heater, a further advantage is, that it is ensured that the temperature at which the heater is switched off or controlled to operate at a lower power is reached.

15           Furthermore, in such beverage makers, the pressure in the boiler may be relatively high without causing substantial steam formation when the brewing water is discharged from the pressurized boiler towards the lower pressure prevailing in or downstream of the beverage brewing unit, because the water temperature is limited by the thermostatic heater control. Thus the temperature to which the water is heated will be the  
20           same, independent of the altitude above sea level at which the beverage is brewed. It is observed that some steam formation upon release of the water from the excess may be advantageous for compensating for heat losses.

          Particular embodiments of the invention are set forth in the dependent claims. Further aspects, effects and details of the invention are described with reference to examples  
25           shown in the drawings.

          Fig. 1 schematically shows an example of a beverage maker according to the invention, comprising a first embodiment of a valve system,

30           Fig. 2 schematically shows a second embodiment of a valve system for a beverage maker according to the invention, and

          Fig. 3 schematically shows a third embodiment of a valve system for a beverage maker according to the invention.

Reference is first made to Fig. 1. In this embodiment the beverage maker comprises a coffee maker, it is noted that the invention also relates to other types of beverage makers, such as for example for making tea or chocolate milk. The shown coffee maker 1 comprises a water reservoir 2, a closed water boiler 5 with a thermostatically controlled heater 30 and a coffee-brewing unit 8. The boiler 5 is completely filled with water 6 and is suitable for resisting a fluid overpressure with respect to the surrounding atmospheric air pressure.

The coffee maker 1 has a water supply line 25 between the reservoir 2 and the boiler 5. The water supply line 25 extends via a pump 3 for pumping water from the reservoir 2 to the boiler 5. Before coffee brewing can be started, boiler 5 heats the water to the desired water temperature. The channel 25 further extends via a check valve 4.

From the boiler 5, a water discharge channel 19 extends via a valve structure 7 to the coffee brewing unit 8. The valve structure 7 is an integrated valve structure in which a return flow control valve 13 is integrated with a discharge control valve 10 as a part of a membrane 11 of the discharge control valve 10. A water inlet 9 of the valve structure 7 connects to a section of the water discharge channel 19 connecting to the boiler 5 and is furthermore in open connection with an inlet portion 14 of the return flow control valve 13. The return flow control valve 13 has a return outlet 18 which is connected to a water return channel 16 leading to the water reservoir 2 which is in open communication with the atmosphere, so that the pressure in the water reservoir is in principle equal to the atmospheric pressure.

In operation, water 6 that is heated in the boiler 5 expands more than the boiler so that an excess volume of water is obtained. When the return flow control valve 13 is open, the excess volume of water from the boiler 5 is allowed to flow back to the reservoir 2 via the return flow control valve 13. However, during initial heating up of water in the boiler 5, both the return flow control valve 13 and the discharge control valve 10 are initially in closed condition. The closed position of the valves 10, 13 ensures that the pressure inside the boiler 5 rises to and is then maintained above atmospheric pressure. The return flow control valve 13 is conditioned to open only when the pressure drop over that valve exceeds a predetermined relief pressure value. Thus excess volumes of water are allowed to flow back to the reservoir 2, but only if the pressure in the boiler 5 has reached a predetermined relief pressure value.

The return flow control valve 13 is additionally adapted to close when the pressure drop over that valve exceeds a predetermined shut-off value larger than the relief pressure value and the discharge control valve 10 is adapted to open in response to a pressure drop over that valve exceeding a predetermined discharge pressure value.

5           The discharge control valve 10 has a discharge outlet 20 connected via a further section of the water discharge channel 19 to the brewing unit 8. After water has been heated in the boiler 5 to a predetermined temperature and the coffee brewing unit 8 has been made ready for brewing coffee, the pump 3 is activated and pumps water from the reservoir 2 to the boiler 5. Thus, the water pumped into the boiler 5 displaces other water out of the  
10 boiler 5 at a substantial pressure. The pressure exerted by this pumping action causes the return flow control valve 13 to close and the discharge control valve 10 to open, so that the pumping pressure pushes water to and through the coffee brewing unit 8.

          The pump 3 may be automatically put into operation in response to a predetermined fluid temperature in the boiler 5. Preferably, the return flow control valve 13  
15 closes before the discharge control valve 10 opens, so that returning heated water to the water reservoir due to the pumping action is avoided.

          The valve structure 7 comprises a rigid housing 26 and, inside the housing 26, a valve body 11 in the form of a membrane of a suitable flexible material such as rubber. The membrane 11 has a substantially disk shaped planform of which the peripheral edge is  
20 clamped between parts of the housing 26. Fig. 1 shows a radial intersection of the valve structure 7 through the centerline of the membrane 11. Also the housing 26 has a substantially disk shaped planform. A number of components of the valve structure 7, among which the abovementioned water inlet 9, the second pressure control valve 10 and the first pressure control valve 13 are each centered with respect to the center line of the housing 26  
25 and membrane 11.

          The return flow control valve 13 is housed in a rigid return flow control valve housing 27 which is integrated in the membrane 11 as a mounting to the rubber portion of the membrane 11. The condition of the return flow control valve 13 is controlled by the action of a first coil spring 15 inside the return flow control valve housing 27. The return flow control  
30 valve housing 27 further has an outlet bore 18. Opening and closing of the return flow control valve 13 are influenced by several design choices, among others relating to the first spring 15, the return flow control valve 13, the return flow control valve housing 27, the inlet portion 14 and the outlet bore 18. These choices are made such that the return flow control valve 13 is adapted to be in the open position only when the overpressure in the boiler 5 is

higher than the relief pressure value but lower than the shut-off pressure value, and to be in the closed position for other values of the overpressure in the boiler 5.

More specifically, when the overpressure in the boiler 5 is lower than the relief pressure value, the pressure acting upon the return flow control valve 13 is such that the spring force of the first spring 15 keeps the return flow control valve 13 in a position closing off the inlet portion 14. When the overpressure in the boiler 5 is higher than the relief pressure value but lower than the shut-off pressure value, the return flow control valve 13 in the return flow control valve housing 27 closes off neither the inlet portion 14 nor the outlet bore 18. And when the overpressure in the boiler 5 is higher than the shut-off pressure value, the valve 13 closes off the outlet bore 18.

Preferably, the relief pressure value is selected within a range between 0.1 bar and 0.5 bar and is most preferably about 0.3 bar. This ensures boiling temperatures of the water in the boiler, which are hot enough even if the coffee is brewed at altitudes of up to about 3000 m, without subjecting the boiler to such pressures, that a particularly strong design is required. An altitude range from sea level to about 3000 m above sea level covers almost all altitudes where beverage makers are customarily used. The temperature to which the water in the boiler is heated may be limited by the boiling temperature, but is preferably limited by a thermostatic heater control. This allows to heat the water to the same temperature, independent of the height above sea level at which the water is heated.

Furthermore, the thermostatic control of the water temperature allows a relatively large tolerance range of the relief pressure value, because deviations in the pressure drop over the return flow control valve 13 do not cause the water to be heated to a temperature that deviates from the desired temperature for brewing coffee as long as it is ensured that the boiling temperature is higher than the temperature at which the thermostatic control switches off or reduces heating power.

The predetermined shut-off pressure value is preferably between 0.4 bar and 1.4 bar and preferably at about 1 bar. This ensures a quick shut-off in response to activation of the pump 3 and the associated pressure build-up, so that the return of substantial volumes of heated water to the water reservoir 2 is avoided.

A second coil spring 12 is clamped between the interior side of the upper part of the valve structure housing 26 and the exterior side of the return flow control valve housing 27 and controls the condition of the discharge control valve 10. Opening and closure of the discharge control valve 10 are influenced by several design choices, among others relating to the second spring 12, the membrane 11 with discharge control valve 10, and the

water inlet 9. These choices are made such that the discharge control valve 10 is adapted to open in response to an overpressure in the boiler 5 above the discharge pressure value. That is, when overpressure in the boiler 5 is less than the discharge pressure value, the spring force of the second spring 12 keeps the discharge control valve 10 in a position closing off the water inlet 9. In response to overpressure in the boiler 5 exceeding the predetermined the discharge pressure value, the valve 10 opens and remains open as long as that pressure condition prevails.

Preferably the discharge pressure value is selected to be above 0.8 bar and more preferably at about 1.2 bar. This ensures a quick pressure build-up causing the return flow control valve to close quickly and reliably. The pumping pressure may be any desired pressure, for instance 1.5 to 2.5 bar for light pressure beverage makers and up to about 15 bar for classic espresso type beverage makers.

The pumping phase can be divided in an early pumping stage and a later pumping stage. In the later pumping stage the fluid flow from the boiler 5 to the brewing unit 8 has developed such that the discharge outlet 20, the tubing 19 and the brewing unit 8 are completely filled with hot water. The brewing unit 8 has a relatively narrow coffee outlet 29. The discharge outlet 20, tubing 19 and brewing unit 8 with coffee outlet 29 create, in this later pumping stage, enough resistance for the fluid flow to keep the discharge control valve 10 in steady open position. That is, the pressure distribution under the membrane 11 constantly remains high enough then.

However, in the early pumping stage, especially directly after opening of the discharge control valve 10, the discharge outlet 20, tubing 19 and brewing unit 8 may not yet be completely filled with hot water. They therefore do not create, in this early pumping stage, enough resistance for the fluid flow to keep the discharge control valve 10 in steady open position. In order to avoid that this may lead to clapper of the discharge control valve 10, the discharge outlet 20 has been provided with a restriction 21 downstream of and closely adjacent to the discharge control valve. The narrowness of the restriction 21 provides sufficient resistance to ensures that in the beginning of the pumping stage the pressure in the space 22 rises quickly, thereby avoiding clapper of the valve 10. It is remarked that, with a view to the life span of the membrane 11, the upper part of the housing 26 is shaped in conformity with the shape of the top side of the membrane 11 for receiving and supporting the membrane 11 together with its integrated parts.

In closed condition, the valve body 11 preventing water passage from the inlet 9 to the discharge outlet has a first surface area communicating with the boiler 5. In opened



condition allowing water passage from the inlet 9 to the discharge outlet, this valve body 11 has a second surface area communicating with the boiler 5, which second surface area is larger than the first surface area. This further contributes to abrupt and full opening of the discharge valve 11 without initial oscillations between a opened and a closed condition and it causes the discharge valve 11 to close in response to a lower pressure than the pressure in response to which it opens. Thus, when the pump 3 is stopped after sufficient amounts of water have been passed through the coffee brewing unit 8 and the pressure gradually reduces as the final amounts of water flow through the brewing unit 8, the discharge valve 11 stays open until the pressure at the inlet 9 is well below the discharge pressure at which the discharge valve 11 opens. Accordingly, the discharge valve 11 immediately closes reliably, which further contributes to water dripping from the discharge channel.

When the pump 3 stops pumping, the rest pressure in the system releases through the brewing unit 8. Valve 10 closes as soon as the pressure in space 22 has dropped to a level where the spring 12 is able to close the valve 10 again. Shrinkage of the fluid in the boiler 5 may lead to underpressure in the boiler 5, which is no problem if the boiler 5 is strong enough or if the check valve 4 allows water to flow into the boiler 5.

It is observed that, while the return flow control valve 13 and the discharge control valve 10 will be designed to open or close in response the passing of predetermined values, in practice, tolerances around these predetermined values will have to be accepted. Such tolerances may have different causes, such as tolerances on the spring force characteristics of the springs 12 and 15, or for example changes caused by deposits on diverse components of the valve structure 7. If a first, second and third tolerance ranges are applicable to the predetermined pressure values, it is preferable that the first, second and third tolerance ranges do not overlap each other. Overlapping of these tolerance ranges may cause malfunctioning of the valve structure 7 in individual cases where the actual predetermined pressure values are related unfavourably to each other.

It is now referred to Fig. 2 in which a second embodiment of a valve structure 47 for a beverage maker according to the invention is shown. The valve structure 47 of Fig. 2 is in many respects identical to the valve structure 7 of Fig. 1. Therefore, some of the corresponding parts of both valve structures have been identified by identical reference numerals.

An essential difference between the two valve structures 4 and 47 is that the valve structure 47 according to Fig. 2 has a different return flow control valve 43. This return flow control valve 43 shown in Fig. 2 is a fully integrated part of the membrane 11 and, in

this example, is made of the same flexible material as the membrane 11. The passageway of the valve 43 is a slit 44 in the valve 43. The valve 43 with its slit 44 is designed such that the slit 44 is open only when the pressure drop over the valve 43 is larger than the predetermined relief pressure. The valve structure 47 further comprises a rigid valve seat 45 connected to the interior side of the upper part of the housing 26 for co-operation with the valve 43 with its slit 44. If the pump 3 (see Fig. 1) starts pumping and the valve 10 opens, the membrane 11 is lifted causing the valve 43 to be pressed with its slit 44 against valve seat 45, thereby closing off the valve 43. In this condition the water is allowed to be discharged to the discharge outlet 20 to the coffee brewing unit, but is prevented from returning to the water reservoir. Because the opening of the discharge control valve 10 causes the return flow control valve 43 to be closed off, it is reliably ensured that the return flow control valve 43 does not remain open when the discharge control valve 10 opens.

It is now referred to Fig. 3 in which a third embodiment of a valve structure 107 for a beverage maker according to the invention is shown in a rest position. The valve structure 107 of Fig. 3 comprises a water inlet 109 to be connected to a boiler, a return outlet 116 to be connected to a water reservoir, and a discharge outlet 120 to be connected to a coffee brewing unit. The valve structure 107 further comprises a rigid housing 126 and, inside the housing 126, a valve 110 with a membrane 111 of a suitable flexible material such as rubber. The membrane 111 has a substantially disk shaped planform of which the peripheral edge is clamped between parts of the housing 126. Also the housing 126 has a substantially disk shaped planform. Integrated in a center region of the membrane 111 is a disk 150 of a rigid material. The disk 150 has a central opening in which a plug 151 is clamped.

A coil spring 112 is clamped between the interior side of the upper part of the valve structure housing 126 and the disk 150 and controls the position of the membrane 111. In the shown rest position of the valve structure 107 the spring 112 presses the membrane 111 against a ring-shaped flange 152 extending, in the interior of the housing 126, upwards from the lower part of the housing 126. The pressing contact between the membrane 111 and the flange 152 is a sealing contact that closes off the passage of water from the water inlet 109 towards the discharge outlet 120.

The plug 151 is made of a suitable flexible material. It comprises an umbrella shaped return flow control valve part 153 projecting from the upper side of the disk 150. The umbrella shaped part 153 along its peripheral edge sealingly presses against the upper side of the disk 150, thus bounding a ring-shaped space 155. The plug 151 sealingly presses with its

periphery against the edge of the central opening in the disk 150, except for a small and narrow axial passageway 154. The passageway 154 connects the space 155 with the space under the disk 150 which space is in direct communication with the water inlet 109.

5 In operation, if the overpressure in the boiler 5, caused by the heating up of the water in the boiler, exceeds a predetermined relief pressure value, the water pushes the umbrella shaped return control flow part 153 along its peripheral edge upwards. This allows excess volume of water to escape towards the return outlet 116, the passage of water between the membrane 11 and a sealing rim 156 being open.

10 When the pump is activated the pressure at the inlet side of the membrane increases and passes the discharge pressure value. This causes the membrane 111 to be pressed upward against the force exerted by the coil spring 112 causing the passage between the membrane 111 and the sealing rim 152 from the inlet 109 to the discharge outlet 120 to be opened while simultaneously causing the passage between the membrane 111 and a sealing rim 156 towards the return outlet 116 to be closed due to sealing contact between  
15 these parts 111, 156. Thus, the membrane 111 forms a valve body of a discharge and return flow control valve 110.

In the examples according to Figures 2 and 3, the discharge pressure in response to which the passage of water to the coffee brewing unit 8 is opened is equal to the shut-off pressure in response to which the passage of water from the boiler 5 back to the  
20 water reservoir 2 is closed off. Nevertheless, it is very reliably ensured that the water return is closed off if the discharge of water is allowed.

Having described the invention with reference to examples, however, many modifications thereto will become apparent to those skilled within the art without deviation from the invention as defined by the scope of the appended claims. For instance, it is possible  
25 to apply two separate pressure control valves having separate inlets connected to the boiler, instead of applying valve structures that integrate the first and second pressure control valves.

## CLAIMS:

1. A beverage maker comprising:

a water reservoir (2);

a closed water boiler (5);

a beverage brewing unit (8);

5 a water supply channel (25) interconnecting the reservoir (2) and the boiler (5);

a water discharge channel (19) interconnecting the boiler (5) and the beverage brewing unit (8);

10 a pump (3) for pumping water out of the boiler (5) to the beverage brewing unit (8);

a return channel (25) interconnecting the reservoir (2) and the boiler (5); and

a valve structure (7; 47; 107) having an inlet (9; 109) connected for water inflow from the boiler (5) and the pump (3), a return outlet (16; 116) connected for returning water to the reservoir (2) and a discharge outlet (20; 120) connected for water outflow to the brewing unit (8), the valve structure (13; 43; 153) being adapted for:

15 preventing water passage from said inlet (9; 109) to said return outlet (16; 116) if the water pressure at said inlet (9; 109) is below a relief pressure value;

20 allowing water passage from said inlet (9; 109) to said return outlet (16; 116) if the water pressure at said inlet (9; 109) is above said relief pressure value and below a shut-off pressure;

preventing water passage from said inlet (9; 109) to said return outlet (16; 116) if the water pressure at said inlet (9; 109) is above said shut-off pressure value;

preventing water passage from said inlet (9; 109) to said discharge outlet (20; 120) if the water pressure at said inlet (9; 109) is below a discharge pressure value; and

25 allowing water passage from said inlet (9; 109) to said discharge outlet (20; 120) if the water pressure at said inlet (9; 109) is above said discharge pressure value;

wherein said relief pressure value, said shut-off pressure value and said discharge pressure value are predetermined at least to the extent that:

said relief pressure value is above atmospheric pressure;

said relief pressure value is smaller than each of said shut-off pressure value and said discharge pressure value; and

said shut-off pressure value and said discharge pressure value are each smaller than pumping pressure at said inlet (9; 109) generated by said pump (3) when said pump is in  
5 operation.

2. A beverage maker according to claim 1, wherein the valve structure (7; 47) includes:

10 a return flow control valve (13; 43) between an inlet portion (14) connected for water inflow from the boiler (5) and the pump (3) and said return outlet (18), said return flow control valve (13; 43) being adapted for:

preventing water passage from said inlet (9) to said return outlet (16) if the water pressure at said inlet portion (14) is below said relief pressure value;

15 allowing water passage from said inlet (9) to said return outlet (16) if the water pressure at said inlet portion (14) is above said relief pressure value and below said shut-off pressure; and

preventing water passage from said inlet (9) to said return outlet (16) if the water pressure at said inlet portion (14) is above said shut-off pressure value; and

20 a discharge control valve (10) between the inlet (9) and the discharge outlet (20), the discharge control valve (10) being adapted for:

preventing water passage from said inlet (9) to said discharge outlet (20) if the water pressure at said inlet (9) is below said discharge pressure value; and

allowing water passage from said inlet (9) to said discharge outlet (20) if the water pressure at said inlet (9) is above said discharge pressure value.

25

3. A beverage maker according to claim 1, wherein the valve structure (107) includes:

30 a return flow control valve (153) between an inlet portion (154) connected for water inflow from the boiler (5) and the pump (3) and the return outlet (116), the return flow control valve (153) being adapted for:

preventing water passage from said inlet (109) to said return outlet (116) if the water pressure at said inlet portion (154) is below said relief pressure value; and

allowing water passage from said inlet (109) to said return outlet (116) if the water pressure at said inlet portion (154) is above said relief pressure value and below said shut-off pressure; and

a discharge and return flow control valve (110) downstream of the inlet (109) and upstream of the discharge outlet (120) and the return outlet (116), the discharge and return flow control valve (110) being adapted for:

preventing water passage from said inlet (109) to said return outlet (116) if the water pressure at said inlet (109) is above said shut-off pressure value;

preventing water passage from said inlet (109) to said discharge outlet (120) if the water pressure at said inlet (109) is below said discharge pressure value; and

allowing water passage from said inlet (109) to said discharge outlet (120) if the water pressure at said inlet (109) is above said discharge pressure value.

4. A beverage maker according to claim 1 or 2, wherein said discharge pressure value is predetermined to be equal to or higher than said shut-off pressure value.

5. A beverage maker according to claim 1 or 2, wherein said relief pressure value is at least 0.1 *bar* over atmospheric pressure.

6. A beverage maker according to any one of the preceding claims, wherein said relief pressure value is at most 0.5 *bar* over atmospheric pressure.

7. A beverage maker according to any one of the preceding claims, wherein said shut-off pressure value is at least 0.4 *bar* over atmospheric pressure.

8. A beverage maker according to any one of the preceding claims, wherein said shut-off pressure value is at most 1.4 *bar* over atmospheric pressure.

9. A beverage maker according to any one of the preceding claims, wherein said discharge pressure is at least 0.8 *bar* over atmospheric pressure

10. A beverage maker according to at least claim 2 or 3, wherein the discharge control valve has a valve body (11; 111), the return flow control valve (13; 43; 153) being an integral part of the discharge control valve body (11; 111).

11. A beverage maker according to any one of the preceding claims, wherein the valve structure is dimensioned for venting all water flow caused by heater (30) induced expansion in the boiler above the relief pressure (30).

5

12. A beverage maker according to any one of the preceding claims, further including a restriction (21) in the discharge channel (19) downstream of and closely adjacent to the valve body (11) of the discharge control valve (10; 110).

10 13. A beverage maker according to any one of the preceding claims, wherein, in closed condition, a valve body (11) preventing water passage from said inlet (9) to said discharge outlet has a first surface area communicating with the boiler (5) and, in opened condition allowing water passage from said inlet (9) to said discharge outlet, said valve body (11) has a second surface area communicating with the boiler (5), said second surface area  
15 being larger than said first surface area.

14. A beverage maker according to at least claim 2 or 3, wherein the discharge control valve (10; 110) and the return flow control valve (43) are coupled for causing the return flow control valve (43) to be closed off in response to opening of the discharge control  
20 valve (10; 110).

**ABSTRACT:**

A beverage maker has a valve structure (13; 43; 153) adapted block the return of water from a boiler (5) to its water reservoir (2) in response to water pressure from the boiler exceeding a shut-off pressure value. The valve structure (7; 47; 107) further includes a discharge outlet (20; 120) connected for water outflow to the brewing unit (8) and is adapted to open a passage from that inlet (9; 109) to the discharge outlet (20; 120) in response to water pressure at the inlet (9; 109) exceeding a discharge pressure value below the pumping pressure. The valve structure (7; 47; 107) is further adapted to block the return of water from the boiler (5) to the water reservoir (2) also in response to water pressure from the boiler below a relief pressure value above atmospheric pressure and below the shut-off pressure value. Thus pressure in the boiler during heating towards boiling is kept above atmospheric pressure.

**Fig. 1**



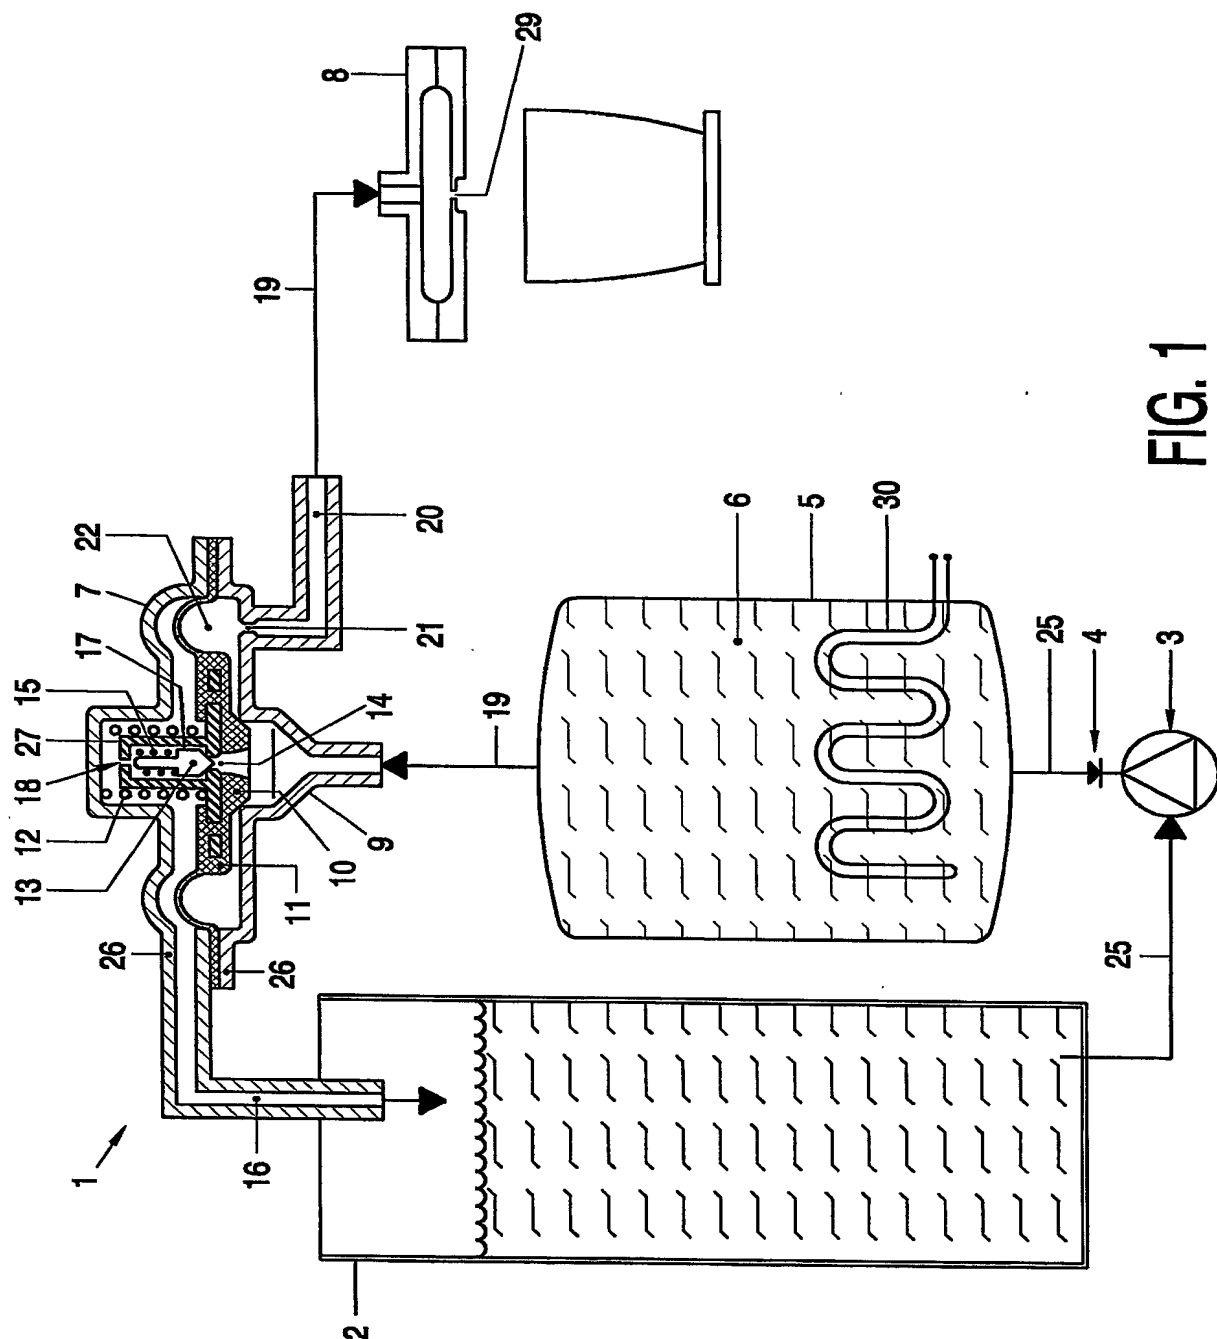


FIG. 1

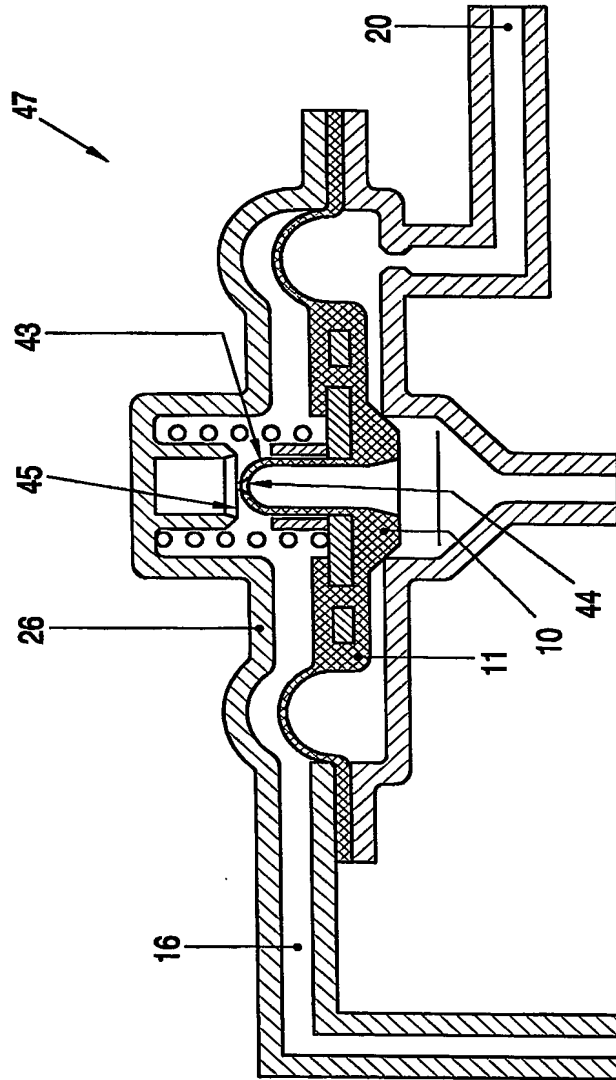


FIG. 2

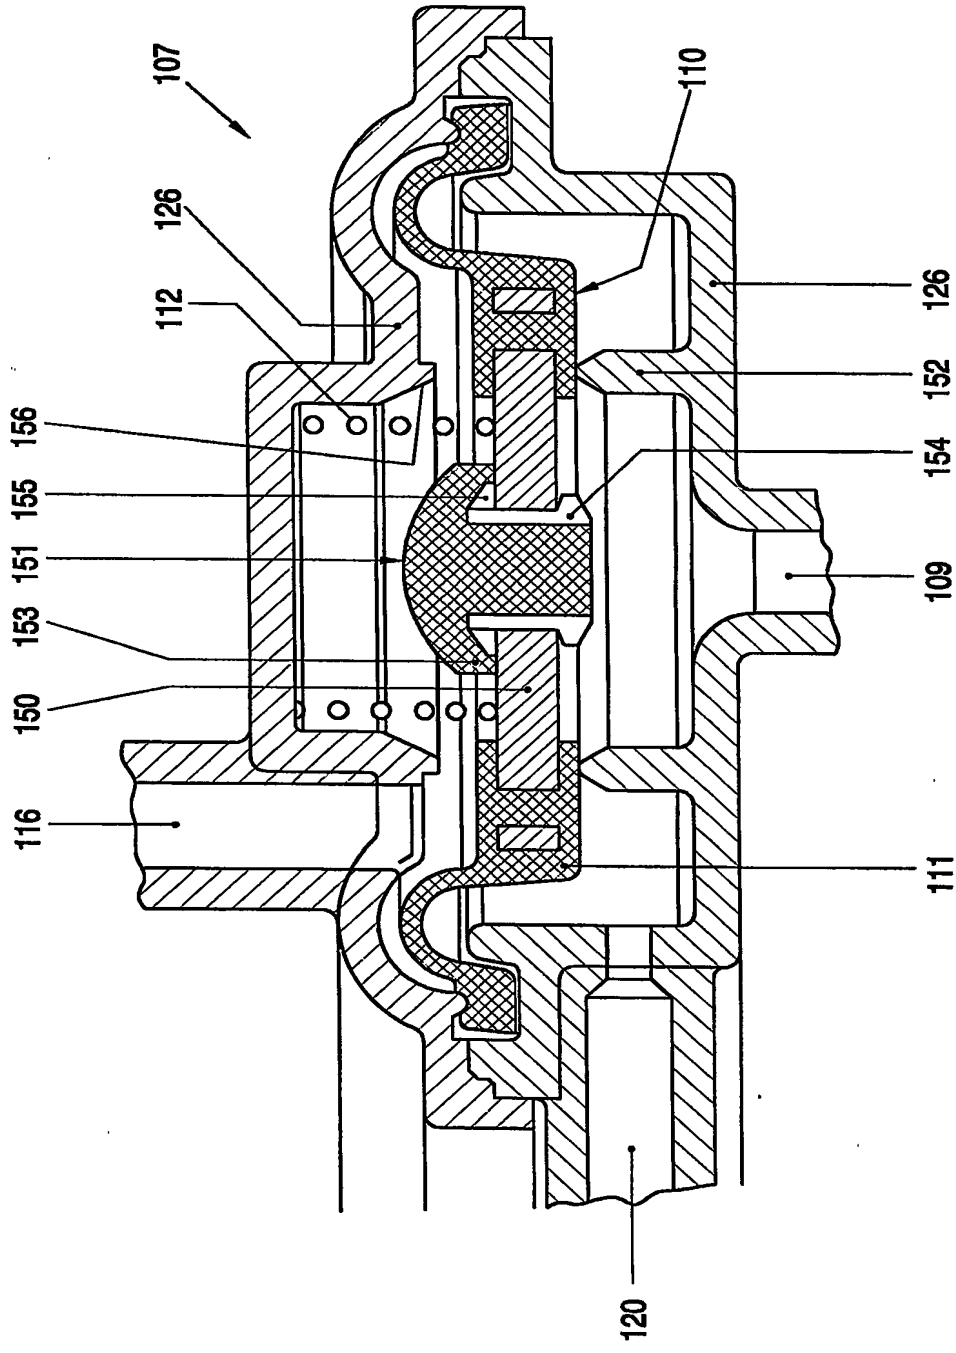


FIG. 3

**PCT/IB2004/051198**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**